

General Replacement Tube Output (8 Watt) Push-Pull *125J Series*

Audio

Features

- Designed for general purpose or replacement use in push-pull tube output circuits.
- Frequency response: 150 Hz. - 15 KHz (+/- 1db max. ref. 1 KHz)
- Open style with minimum 10" long primary & secondary leads.
- Also see our **125H Series**.
- For single ended use, see our **125SE Series**.
- For more impedance options, see our universal impedance push-pull **125 Series**





ASK ABOUT
Custom
Transformers
& Chokes



Classic

✓ RoHS

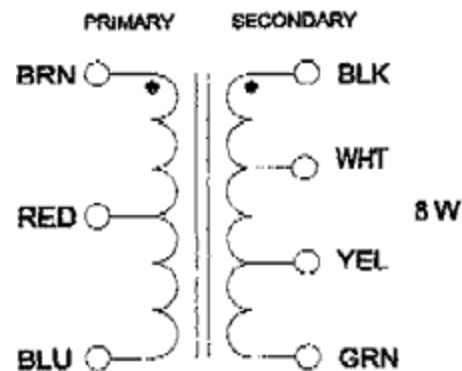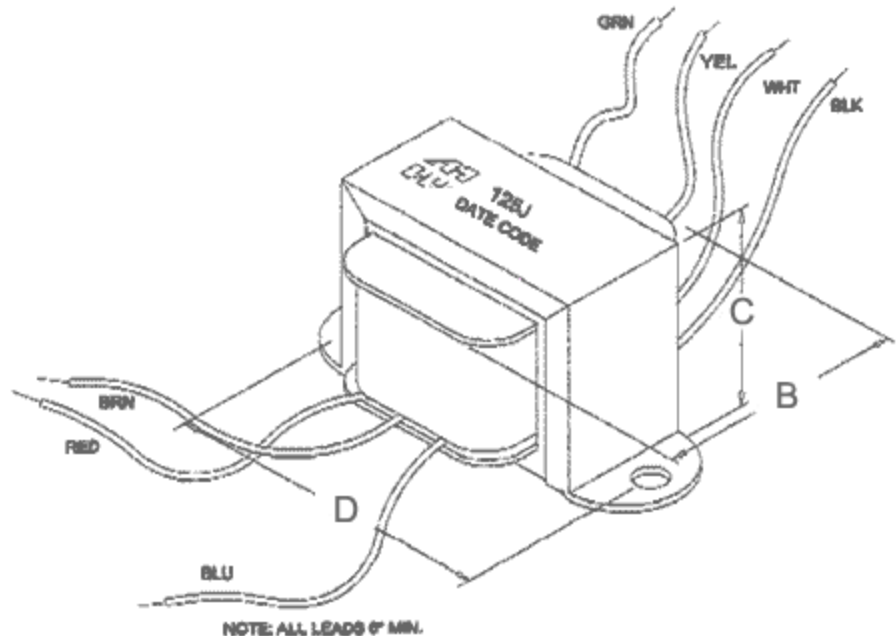

Part No.	Audio Watts	Primary Impedance	Secondary Impedance	Primary Inductance	Weight (lbs.)	Overall Dimensions				Mounting Hole
		(Ohms)	(Ohms)			A	B	C	D	G
125J	8	2.5K or 4K	6/8 or 3.2/4	5.60 H	1	3.25	1.50	1.94	2.81	0.19

Hook Up Data

PRIMARY IMPEDANCE		
Plate to Plate		
Brown to Blue	SECONDARY IMPEDANCE	USE SECONDARY
(Ohms)	(Ohms)	LEAD CONNECTIONS
4,000 C.T.	6 - 8	WHT - GRN
4,000 C.T.	3.2 - 4	WHT - YEL
2,500 C.T.	6 - 8	BLK - GRN
2,500 C.T.	3.2 / 4	BLK - YEL

Tags: **audio transformer, tube audio, valve audio, push-pull, output, tube output, 8 watt**

Data subject to change without notice.