

General Replacement Tube Output (8 Watt) Push-Pull *125H Series*

Features




- Designed for general purpose or replacement use in push-pull tube output circuits.
- Frequency response: 150 Hz. - 15 KHz (+/- 1db max. ref. 1 KHz)
- Open style with minimum 5" long primary leads, secondary solder lugs for convenient secondary connections.
- Also see our **125J Series**.
- For single ended use, see our **125SE Series**.
- For more impedance options, see our universal impedance push-pull **125 Series**.



ASK ABOUT
Custom
Transformers
& Chokes



Classic

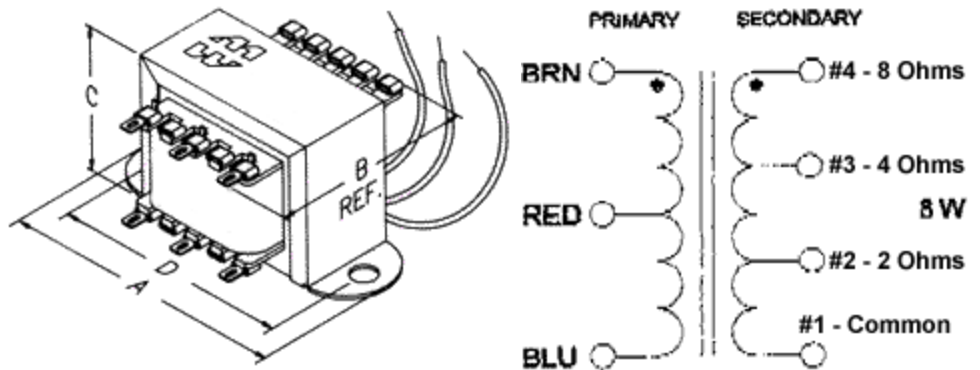

Part No.	Audio Watts	Primary Impedance	Secondary Impedance	Primary Inductance	Weight (lbs.)	Overall Dimensions				Mounting Hole
		(Ohms)	(Ohms)			A	B	C	D	G
125H	8	10K	2, 4 or 8	5.60 H	0.55	2.81	1.00	1.63	2.38	0.19

Tags: audio transformer, tube audio, valve audio, push-pull, output, tube output, 8 watt

Data subject to change without notice.