


5G CPE02 LED Status Reference

Indicators	Definitions
 Network	Blinking in Red - Network Disconnected Blinking in Green - Connecting to the Cellular Network Steady in Green - Cellular Network Connected Blinking in Blue - Connecting to the Wired Network Steady in Green - Wired Network Connected
 Wi-Fi	Off - Function Disabled Blinking in Green - Loading Wi-Fi Driver Steady in Green - Working as AP
 Cellular	Off - Function Disabled Steady in Red - Poor Cellular Signal Steady in Blue - Medium Cellular Signal Steady in Green - Good Cellular Signal
 System	Off - Power Off Steady in Red - Booting the Device Blinking in Red - System Error Steady in Green - System Working Steady in Blue - Upgrading the Firmware

5G Inspiring Connections Empowering Moments

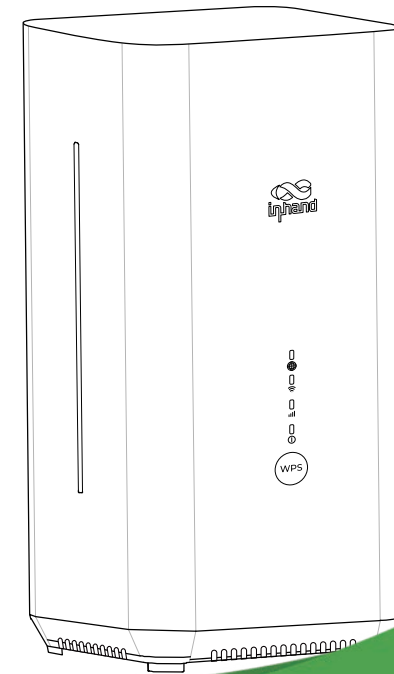

5G CPE02 User Guide

Packing List

CPE02 comes with standard accessories. When the product is received, please check if all the accessories are there. If any item is missing or damaged, please contact InHand Networks.


Part Name	Quantity	Description
CPE02	1	5G CPE02
Ethernet Cable	1	1m Eth. Cable
Power Adapter	1	Round Hole DC Power Adapter
QSG	1	Quick Start Guide
Mounting Accessories	1	1 Set of wall mounts

Quick Start Guide


1. Assembling CPE02

a. Installing the SIM card

Locate the SIM card slot on the bottom of the device.
Gently lift the rubber flap covering the slot.

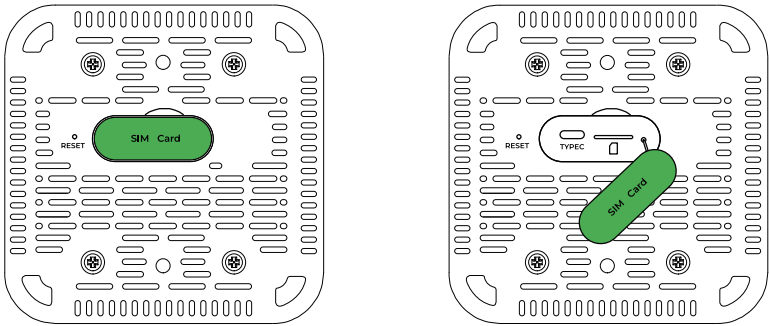


Insert your Nano-SIM card into the slot and the notched edge aligned with the slot.
Press firmly until it clicks into place.
Close the rubber flap securely to protect the SIM slot from dust or moisture

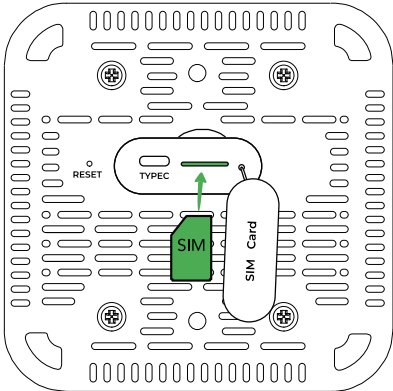

2. Powering on CPE02


Connect the included power adapter to the device's power port (marked with a power symbol) and plug it into a standard wall outlet. During the device start-up process, the system indicator will turn solid red.

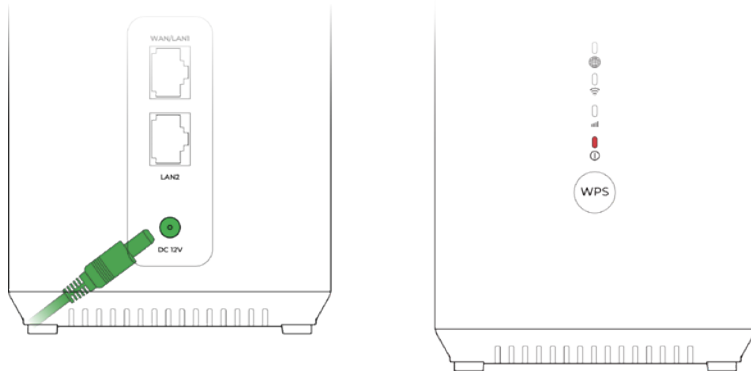

3. Installing CPE02


a. Desktop Installation

- 1) Ensure the selected desktop area is free to obstructions to provide adequate space for the device.
- 2) Verify the correct installation of the SIM card and power cable.
- 3) Place the device steadily on the tabletop

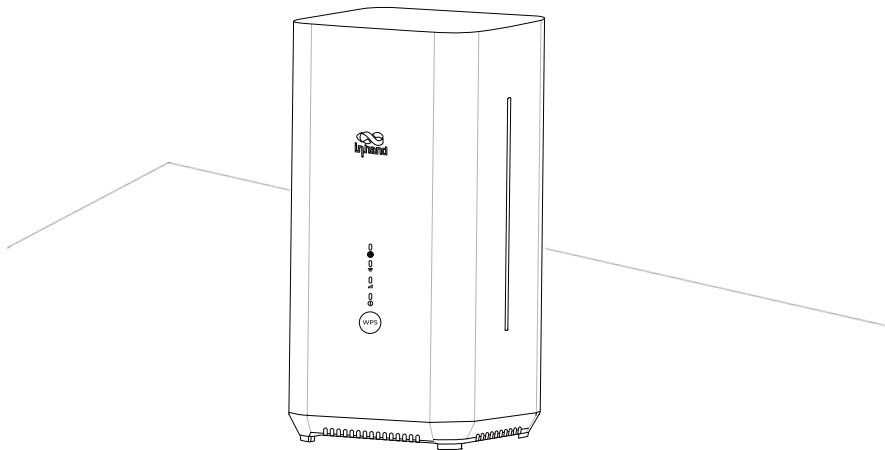


b. Wall-Mounted Installation


- 1) Secure the Mounting Bracket: Align the bracket on the wall using a level tool to ensure accuracy. Then use 4 expansion screws to firmly attach the bracket to the wall. For added stability, ensure screws are tightened clockwise until fully seated.
- 2) Prepare Cables: Thread the power and Ethernet cables through the bracket's cable management holes after securing the bracket.

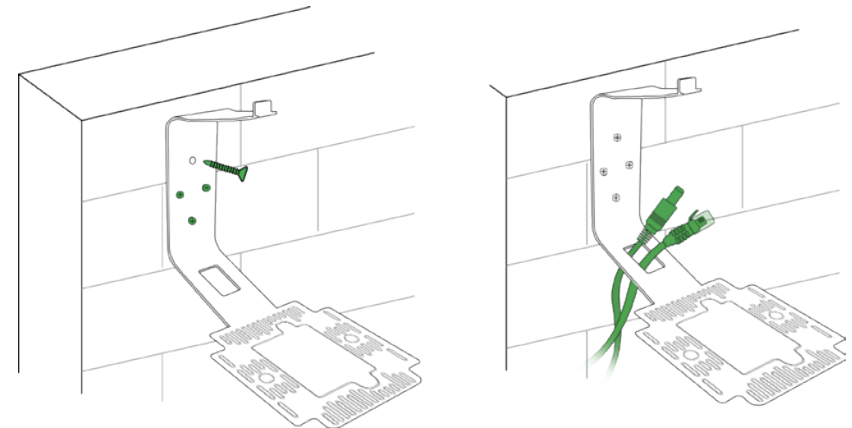

- 3) Align the mounting notch above the RJ45 port with the protrusion on the upper part of the bracket. Align the screw holes on the bottom of the unit with the round holes in the bracket. Secure the unit by hand tightening the screws.

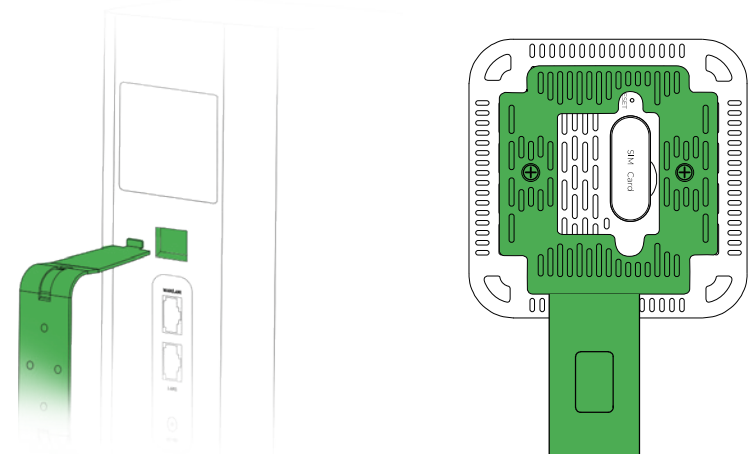


- 4) Connect Cables: Power & Network: Insert the power adapter into the device's port and connect the Ethernet cable to a LAN port.

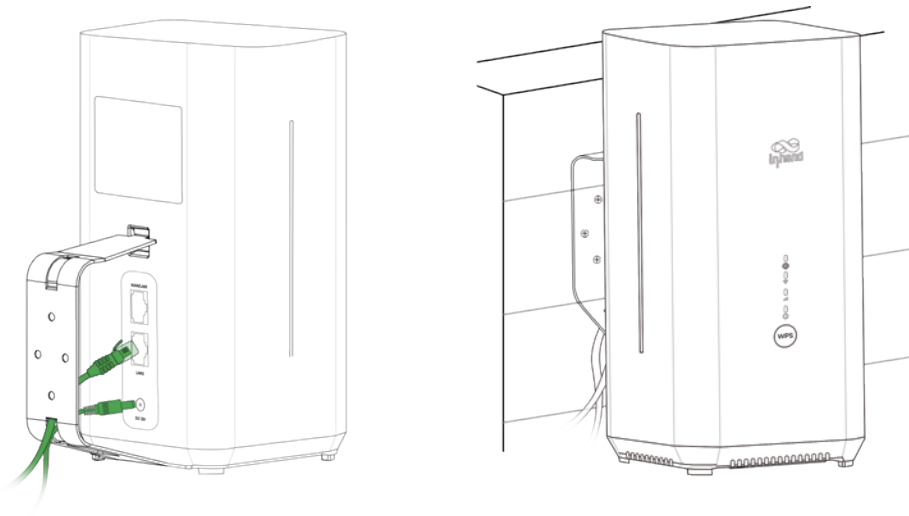

4. Connecting to CPE02

a. Connecting Via APP


Log into the InCloud APP. Click the "Device" directory below to enter the [Device] page, and click the "menu" button in the upper right corner, and select [Add Device]. Scan the QR code on the CPE02 to add the device.

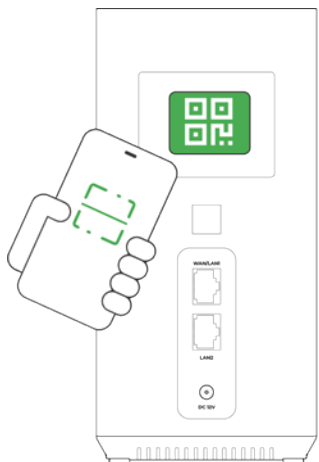

InCloud APP

b. Connecting Via PC

- 1) Connect the device's LAN port to your PC using an Ethernet cable. Then, open a browser and go to <https://192.168.2.1> to access the web UI.
- 2) Check the nameplate above the device's network port for the login username and password.

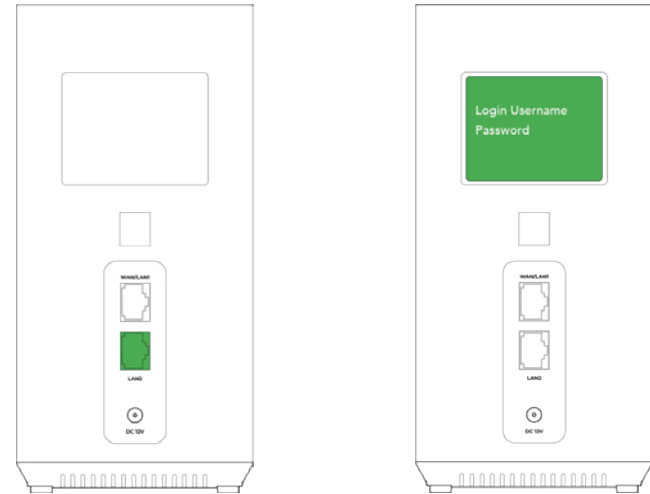

- 3) It is recommended to change the username and password after logging in.

c. Managing CPE02

Go to <https://star.inhandcloud.com/> to manage your devices remotely using InHand InCloud Manager.

