

Step-Down (230VAC to 115VAC) Plug-In 175EU Series





Note: This product line has been discontinued as a stocked series. Information is for reference only. For alternative solution assistance, please **contact Hammond here** or call: USA (716) 630-7030, Canada and International (519) 822-2960.



Features

- Single winding, does not provide isolation, for use where equipment is already isolated and only voltage change is required.
- World wide applications, 50 or 60 Hz. operation, step down (230VAC to 115 VAC).
- Input is circuit breaker protected.
- Hi-pot tested to 2 KV RMS.
- Indoor use only.
- Remember - These units do NOT convert line frequency.
- Note: Due to U.L. changes in 2007 we have discontinued production of this version.

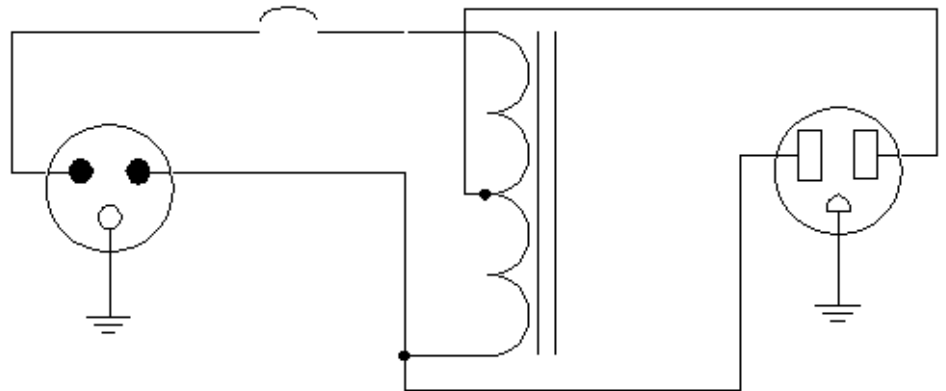

Capacity		Overall Dimensions					
Part No.	VA	A	B	C	D	E	Wt. Lbs.
175A-EU	100	3.16	4.25	3.81	2.50	2.94	3.5
175B-EU	200	3.16	4.50	3.81	2.50	3.19	4.5
175C-EU	300	3.16	5.00	3.81	2.50	3.69	6
175D-EU	500	3.80	6.00	4.68	3.00	4.81	10
175E-EU	750	3.80	7.06	4.68	3.00	5.38	14
175F-EU	1000	3.80	7.06	4.68	3.00	5.38	14.5
175G-EU	1500	4.40	6.63	6.30	3.50	6.09	22

Data subject to change without notice.

