


Type 1 Mild Steel Splitter Box *CSB Series*

Hinged Door with Screw

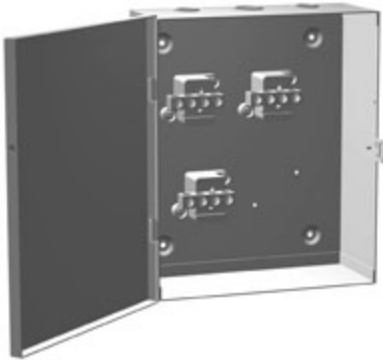

Application

- The splitter boxes are designed for indoor distribution of up to 600 A (max) service (600V max) using either 3 or 4 wires. 75° C conductor ampacity permitted.

Standards

- CSA Type 1
- Complies with
 - IEC 60529, IP20

Construction

- Formed and spot welded from 14 or 16 gauge steel.
- Factory installed splitter blocks - 3 or 4 wire option. Empty box without splitter blocks also offered.
- Series of knockouts on each side.
- Padlocking hasp.

Finish

- Enclosure and cover are finished in ANSI 61 gray powder coating.

Accessories

- Splitter Blocks
- Grounding Kits

New and improved PDF part drawing files with more detail now available.

Click part number in table below to access PDF, DXF, and STEP files.

3 Wire		4 Wire		Less Blocks		CU/AL		Enclosure			Splitter Block Reference
Part No.		Part No.		Part No.		Amps	H	W	D		
CSB73		CSB74		CSB70		70/70	12.00	10.00	4.00		CSBL125B
CSB103		CSB104		CSB100		125/120	15.00	10.00	4.00		CSBL125B
CSB203		CSB204		CSB200		225/180	18.00	12.00	5.00		CSBL225
CSB403		CSB404		CSB400		400/400	24.00	17.00	6.00		CSBL400
CSB603*		CSB604*		CSB600*		600/600	30.00	24.00	7.00		CSBL600

* 14 gauge steel

