


Deep Hinged Window Kits *1481WDH Series*



Features

- Extra deep kits are designed to provide protection and easy access to components and equipment installed inside an enclosure.
- Frame is 14 gauge mild steel or 316L stainless steel.
- Maintain environmental protection level of enclosure. Painted mild steel maintain Type 4 and 12. Stainless Steel maintain Type 4, 4X and 12.
- Quarter turn latch for easy access.
- 2.5 inches of extra usable depth
- Oil resistant neoprene gasket ensures a watertight seal.
- Hinges can be oriented in any direction.
- Window is 0.25" thick, UV Resistant Polycarbonate.
- Conveniently sized to allow mounting on the door of any Hammond Wallmount Series enclosure, or in any other Hammond enclosure with a suitable mounting surface.
- Mounting hardware and template are included.
- Finished in ANSI 61 gray recoatable powder or natural brushed stainless steel.

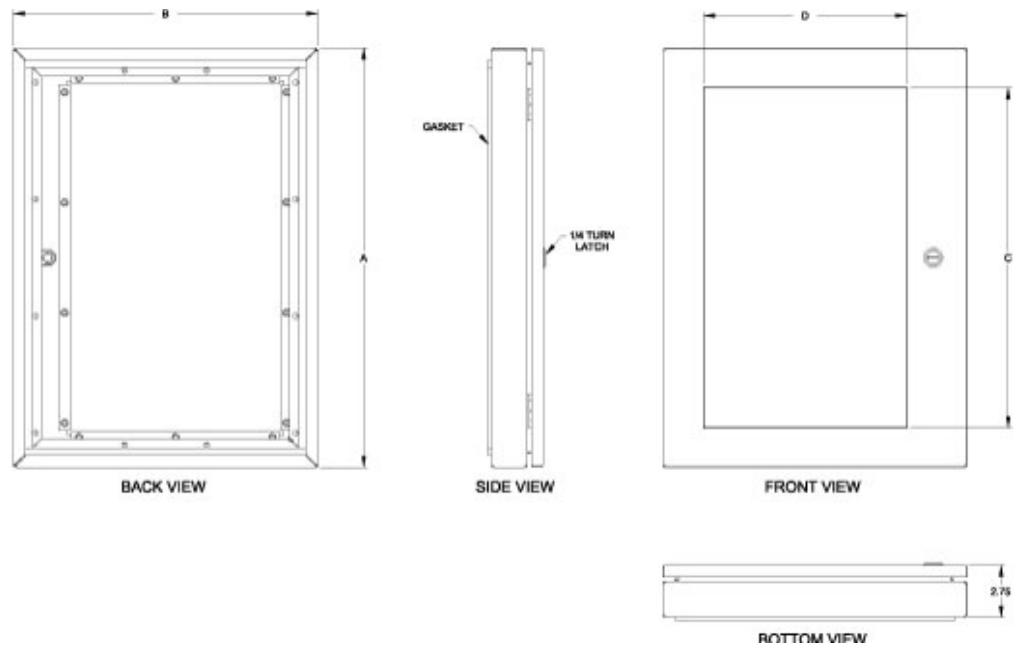

Painted Steel Part No.	316 Stainless Steel Part No.	Overall Dimensions		Viewing Area		Latch Qty	Maximum Cut-Out Size	
		A	B	C	D			
1481WDH14 18"	1481WSSDH 1418"	12.19	14.56	8.00	9.17	1.00	9.19	11.56
1481WDH16 12"	1481WSSDH 1612"	14.19	8.14	10.00	2.75	1.00	11.19	5.14
1481WDH16 20"	1481WSSDH 1620"	14.19	16.14	10.00	10.75	1.00	11.19	13.14
1481WDH16 24"	1481WSSDH 1624"	14.19	20.14	10.00	14.75	1.00	11.19	17.14
1481WDH20 16"	1481WSSDH 2016"	18.19	12.14	14.00	6.75	1.00	15.19	9.14

Painted Steel Part No.	316 Stainless Steel Part No.	Overall Dimensions		Viewing Area		Latch	Maximum	
		A	B	C	D	Qty	Cut-Out Size	
1481WDH20 24 ¹	1481WSSDH 2024 ²	18.19	20.14	14.00	14.75	1.00	15.19	17.14
1481WDH24 16 ¹	1481WSSDH 2416 ²	22.19	12.14	18.00	6.75	1.00	19.19	9.14
1481WDH24 20 ¹	1481WSSDH 2420 ²	22.19	16.14	18.00	10.75	1.00	19.19	13.14
1481WDH24 30 ¹	1481WSSDH 2430 ²	22.19	26.14	18.00	20.75	1.00	19.19	23.14
1481WDH30 24 ¹	1481WSSDH 3024 ²	28.19	20.14	24.00	14.75	2.00	25.19	17.14
1481WDH36 24 ¹	1481WSSDH 3624 ²	34.19	20.14	30.00	14.75	2.00	31.19	17.14

¹ UL/ CSA Type 12 and Type 4

² UL/ CSA Type 12, Type 4 and Type 4x