



1.

DETAIL A LONG INNER BRACKET ORIENTATION

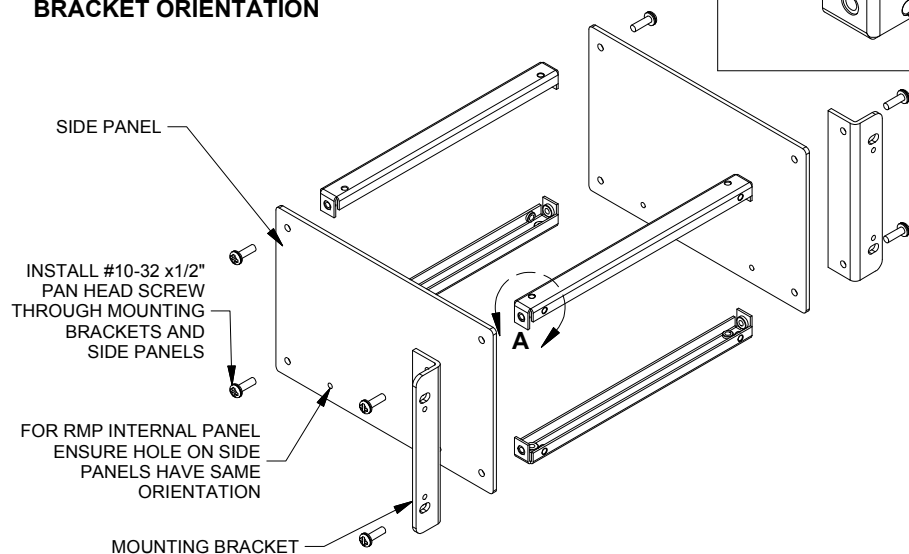


SHORT INNER BRACKET ORIENTATION

(USED ON RMC
RACKS WITH
HEIGHT OF 1.75")




RMP INTERNAL PANEL (OPTIONAL, PURCHASE SEPARATELY)

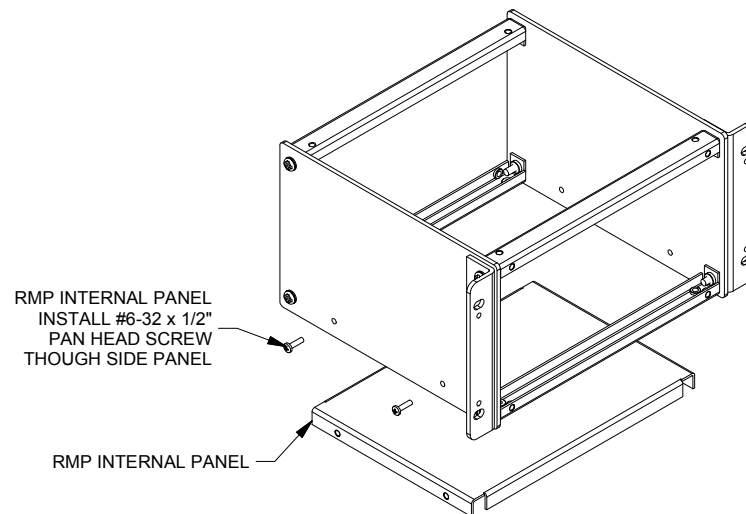


2.

FOR VENTED VERSION
VENT ORIENTATION
CAN BE AT THE
FRONT OR BACK

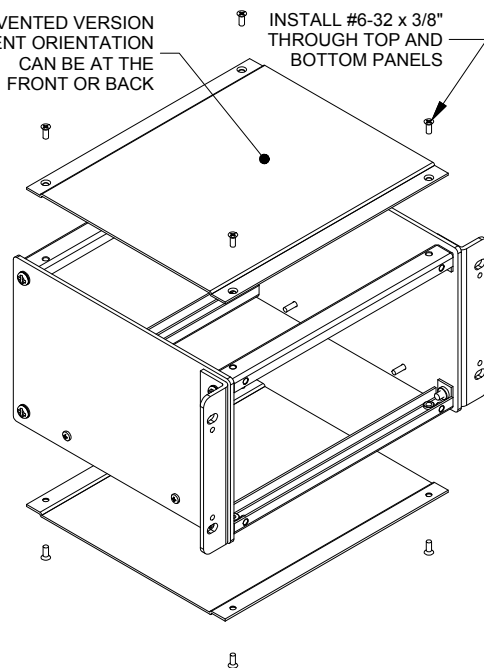

3.

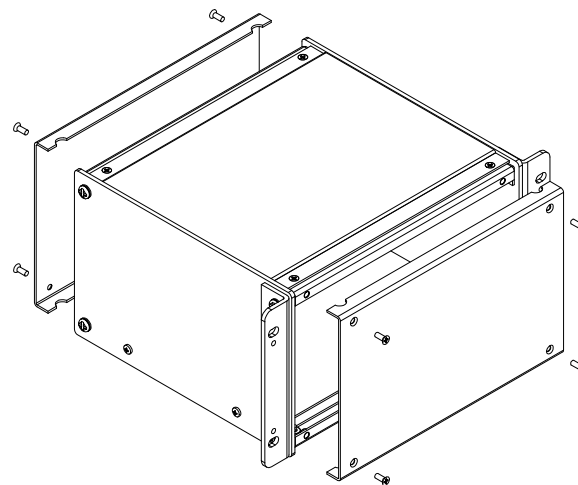

Recommended
screw torque
8.9-9.4 lbf-in
(100-110 cN-m)

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmfg.com for quotes
Solid models of this enclosure available in STEP or IGES.
(Part number and text placement/orientation on our products are subject to change,
we do not recommend using them as a locating reference for modification purposes)

