

ACC050

Extension Column Stabilizer Kit

FOR 1-1/2" SCHEDULE 40 EXTENSION COLUMNS

The ACC050 Extension Column Stabilizer Kit is designed to reduce unwanted swaying in installations involving long extension columns. Two column supports are included to attach to any standard Peerless-AV® 1.9" (48.26mm) OD extension column, significantly improving stability and reducing undesirable movement of mounted equipment. Compatible with 1-1/2" schedule 40 extension columns, the ACC050 is an essential accessory for any ceiling mount installation where column length or drop creates the potential for movement.

Note: The extension column must be longer than 21" (533mm) to use the stabilizer.

- Reduces unwanted swaying that may occur with long or extended drop lengths
- For use with 1-1/2" schedule 40 extension columns with 1.9" (48.26mm) OD (outer diameter)
- Includes two column supports for secure attachment to extension column
- Includes hose clamp and wood joist mounting hardware
- Extension column must be longer than 21" (533mm) to use stabilizer
- 16-gauge cold rolled steel construction for durability
- Scratch-resistant black powder coated fused epoxy finish



RoHS COMPLIANT

TAA COMPLIANT

Please visit peerless-av.com/en-us/patents for patent information.

Model Numbers

WARRANTY: Limited 5-year

ACC050	Extension Column Stabilizer Kit for 1-1/2" Schedule 40 Extension Columns
--------	--


Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
ACC050	29.66" x 2.18" x 1.75" (753 x 55 x 44mm)	2.04lb (0.93kg)	NA	Scratch-Resistant Powder Coated Fused Epoxy	Black

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
ACC050	36.00" x 4.00" x 4.00" (914 x 102 x 102mm)	2.84lb (1.3kg)	735029208471	Two Column Supports, Hose Clamp, Wood Joist Mounting Hardware, and Installation Instructions	1

Compatible with:

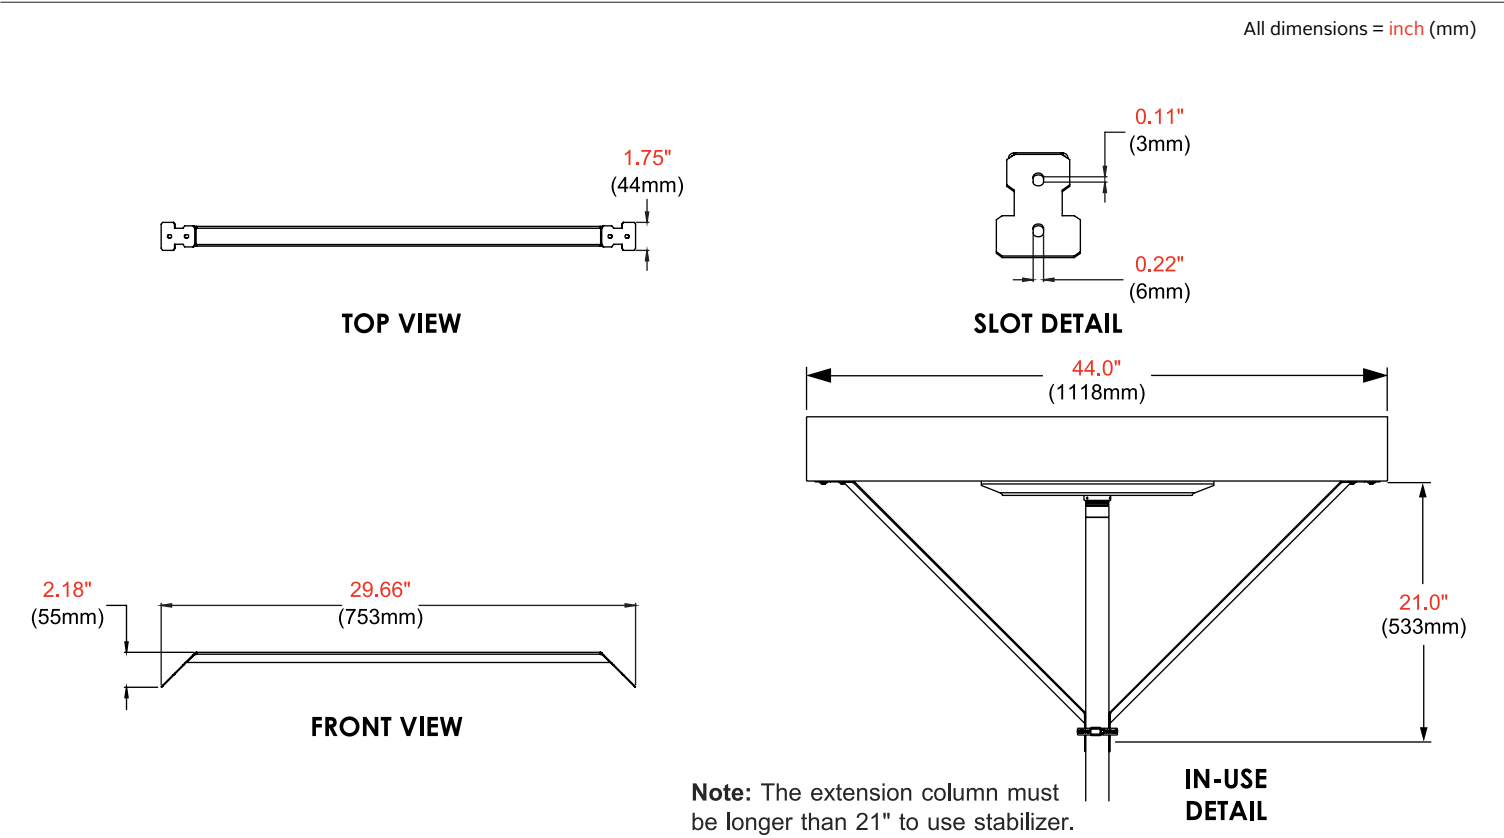

Architect Specifications

The Extension Column Stabilizer shall be a Peerless-AV® model ACC050 and shall be mounted where indicated on the plans. It shall consist of two column supports, a hose clamp, and wood joist mounting hardware. It shall be constructed primarily of 16-gauge cold rolled steel and finished in black fused epoxy. Assembly and installation shall be done according to the instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, kiosks, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502
USA
(800) 865-2112
(630) 375-5100

Peerless-AV EMEA
Unit 2 Curo Park
Frogmore, St. Albans
Hertfordshire, AL2 2DD
United Kingdom
+44 (0) 1923 200 100

Peerless-AV B.V.
Papendorpseweg 75
3528 BJ Utrecht
The Netherlands
+31 (0) 70 770 8037

Peerless-AV Latin America
Av. de las Industrias 413
Parque Industrial Escobedo
General Escobedo, N.L.,
México, 66062
+52 (81) 8384-8300

