


BPC100 Home and Business Phone Connect

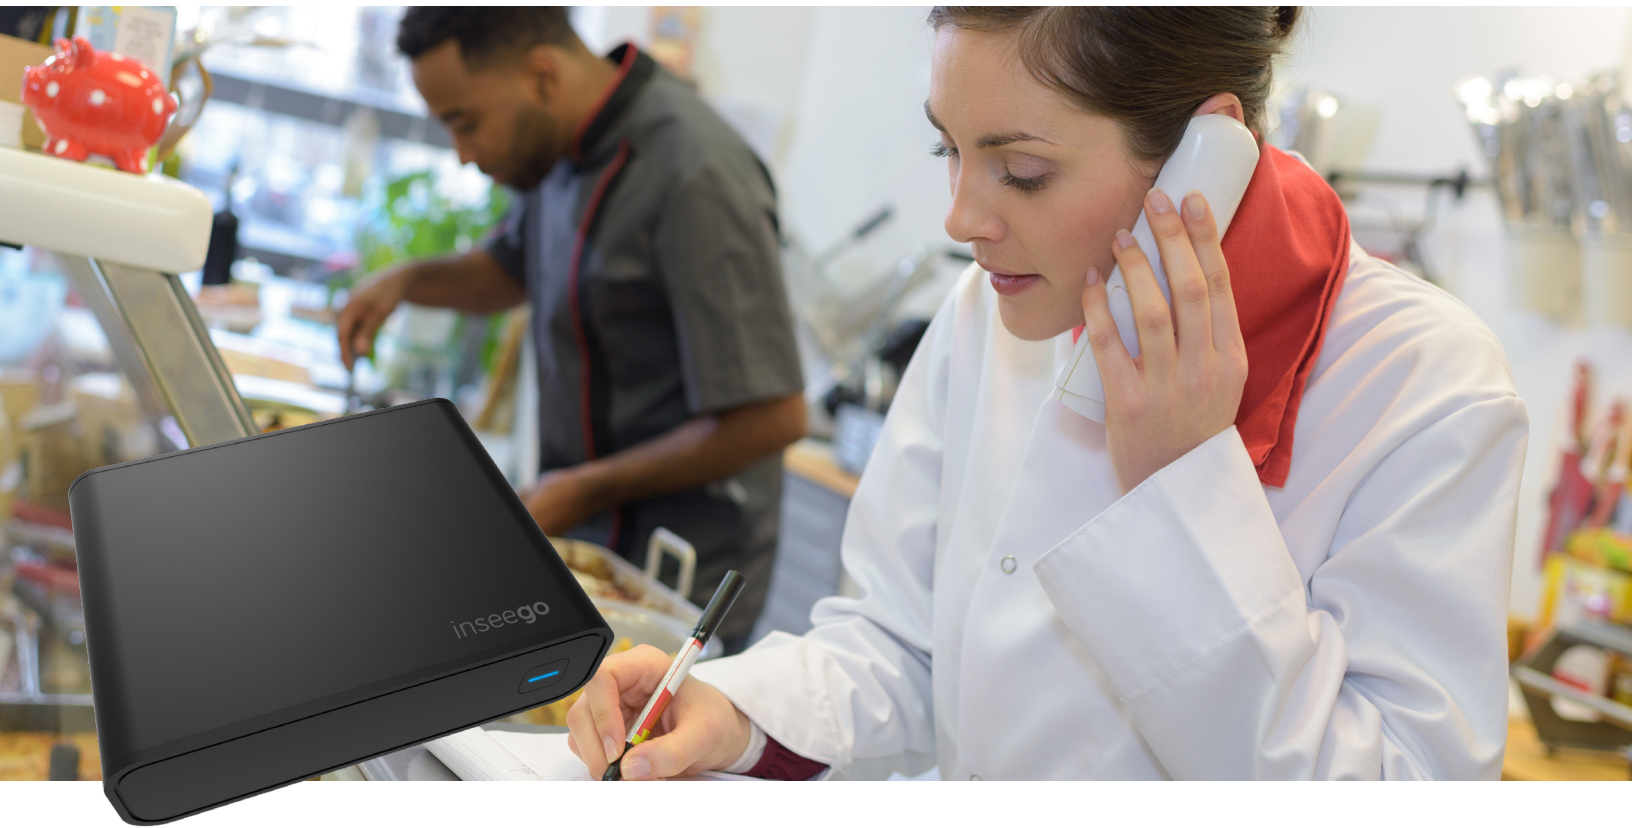

About Inseego

As a U.S.-based company, we design and develop all of our products in the USA and hold them to the highest security standards. Our products and solutions are trusted by top tier carriers, government entities, and Fortune 500 enterprise customers.

HD Voice over LTE (VoLTE)

BPC100's VoLTE delivers voice calls over a 4G LTE network allowing you to hear inbound and outbound calls in high-definition with clear, natural sounding audio.

Flexible connectivity options

Equipped with multiple plug and play connectivity options to support consumers or businesses. BPC100 offers an RJ45 Ethernet port with Cat 4 data speeds for powering your devices such as computer, router or point-of-sale terminals. In addition, the BPC100 includes an RJ11 for phone connections and a dedicated RJ31 port security/alarm systems.

Keep your connections running

BPC100 offers battery backup support with 3 AA batteries that kick in immediately upon power failure.

Ready for any job

The portable nature of the device allows customers to quickly deploy where it is needed most in kiosks, construction trailers and small offices. The BPC100 is an excellent replacement for SMB customers trying to cut the cord on local phone service.

Best in class processor and technology

Purpose-built to deliver seamless, reliable and secure phone connections with optimized antenna performance.

Technology by Inseego: Always a Step Ahead

With advanced security, intelligent antenna features and more, Inseego keeps you on the leading edge.

BPC100 Product Specifications

Technology

- LTE CAT 4
- B2, B4, B5, B12, B13, B14, B66

Chipset

- Qualcomm® 9207

Module

- Quectel EC25-AF (CAT 4)

Ports

- 1 Phone (RJ11)
- 1 Alarm System (RJ31)
- 1 Ethernet (RJ45)
- Antenna (Main & Diversity) – SMA (2)
- MicroUSB (Power Adapter)

Batteries

- 3 Non-rechargeable AA

SIM

- 4FF

GPS

- A-GPS with SUPL for E911 only

Dimensions

- 118mm x 88mm x 33 mm (4.65 in x 3.46 in x 1.30 in)

Weight

- 272g (9.59 oz)

Operating Temperature

- -20 °C to +60° C (-4°F to 140° F)

Customer Interface

- Internet: Inseego WebUI for device management
- Device: Multi-color LED status indicator

Standards /Approvals /Certifications

- FCC



For more information: sales@inseego.com

Visit us our website: inseego.com

Specifications are subject to change. Please see your Inseego contact for more details.

©2021 Inseego, Corp All rights reserved.

LTE is a trademark of ETSI. All other marks contained herein are the property of their respective owners.

* Data plan required. Coverage subject to network availability.