

# Ericsson Cradlepoint R1900

2026-08-18

---

The Ericsson NetCloud Mobile Performance Service with the R1900 5G router is a ruggedized 5G networking platform, designed to provide persistent connectivity for in-vehicle deployments. Ericsson NetCloud provides connectivity, network, security, location, and IoT services to connect everything in the vehicle, while providing access to IT for remote management, troubleshooting, and analytics.

## Ideal for High-Performance In-Vehicle Connectivity

For organizations that depend on field forces and mobile networks, the Ericsson Cradlepoint R1900 with the Ericsson NetCloud Mobile Performance Service plan provides a ruggedized GNSS/GPS-enabled in-vehicle network solution. When coupled with the Advanced Mobile Performance Service plan, it provides threat management, web filtering, application visibility, analytics, and advanced GNSS/GPS functionality including location tracking and cellular coverage maps. The R1900 accommodates environmentally harsh environments while delivering enterprise-class standards of reliability, scalability, comprehensive management, and security.

## 5G Embedded High-Performance Solution

The R1900 mobile router includes an embedded 5G modem that can automatically connect to Cat 20 LTE if the vehicle moves outside of 5G coverage. In addition, the R1900 router is designed to accept the RX30 managed accessories which provide either four additional GbE PoE ports or four additional GbE ports and a second modular modem. It also has the ability to act as a controller for a separate Ericsson Cradlepoint 5G wideband adapter. These two capabilities, along with the continually improved Ericsson NetCloud platform, ensure the ability for future expansion and the best investment protection available.



[Product Page](#)



[Ericsson NetCloud Service](#)



[Quick Start Guide](#)

## Notable Features


- Deploy the ultimate 5G NR / Cat 20 LTE mobile networking solution with industry-leading features
- Add a second cellular modem with the optional RX30 managed accessory for simultaneous</br>dual-carrier connectivity
- Take advantage of Wi-Fi 6 for the best possible connections
- Enable unified edge security with application aware multi-zone firewalls, IDS/IPS, and internet security
- Define policies through centralized cloud-based management for easy deployment at scale
- Integrate into Automatic Vehicle Location systems with discrete GNSS and dead reckoning
- Create a cellular coverage map for complete visibility into your area's 5G and LTE coverage
- Extend your deployment with additional PoE ports, GPIOs, NetCloud SDK and API, Bluetooth, and container support for customizable solutions

## Key Software Capabilities

Ericsson NetCloud Mobile Performance Service with the R1900 mobile router provides everything needed to unlock the power of 5G and connect vehicles, users, and IoT to critical applications and services. Ericsson NetCloud includes router software for optimizing routing, VPN, SD-WAN, and security capabilities along with capabilities centralized in the cloud such as group policy definition, reports, troubleshooting, and analytics dashboards as well as cellular coverage maps. The service comes with a warranty for as long as there is an active subscription on the router, online training, live and online support, and continuous software updates for both the router and the modem.


### Coverage Map

Ericsson NetCloud uses GNSS/GPS and 5G/4G cellular health to provide precise analytics about location and signal strength. Data can be mapped to display both the current and historical locations of a vehicle, as well as generate detailed coverage maps that display cellular health, allowing users to gain operational insights and solve problems.

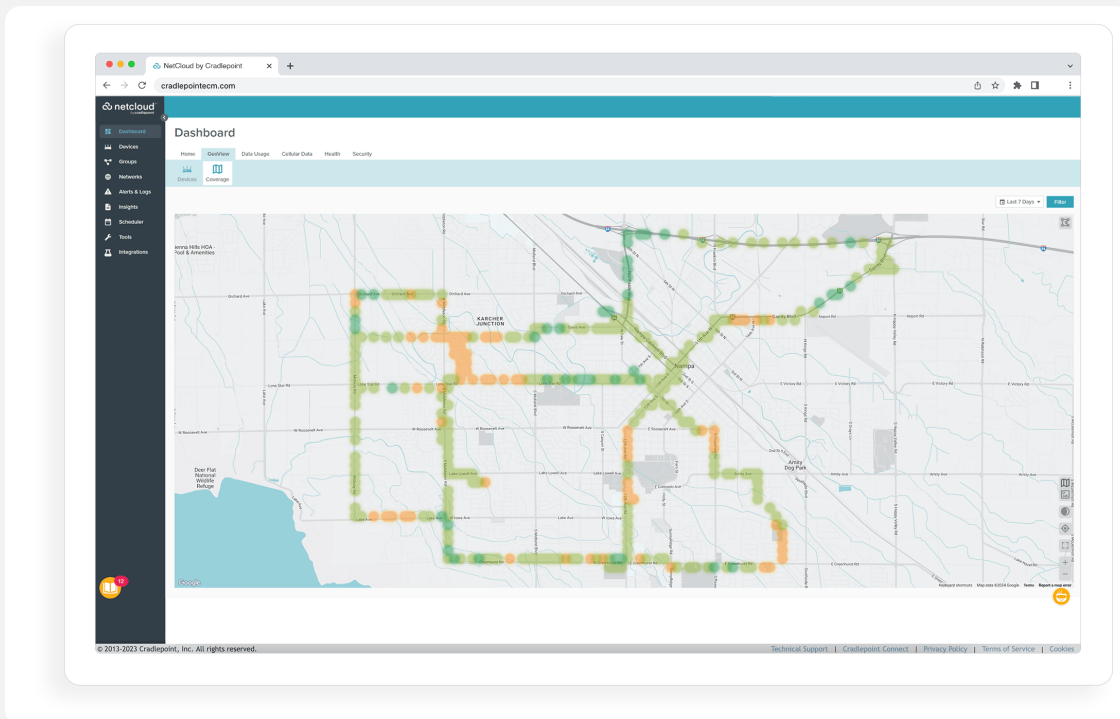


### Advanced Software Lifecycle Management

Ericsson NetCloud improves the typical software lifecycle management process. New features are continuously delivered to Ericsson NetCloud and become available for the router without interrupting network performance. Software versions are tracked for every endpoint, with the latest update just a click away. Straightforward subscription and license management is easily accessible and provided to keep the network running without interruption.

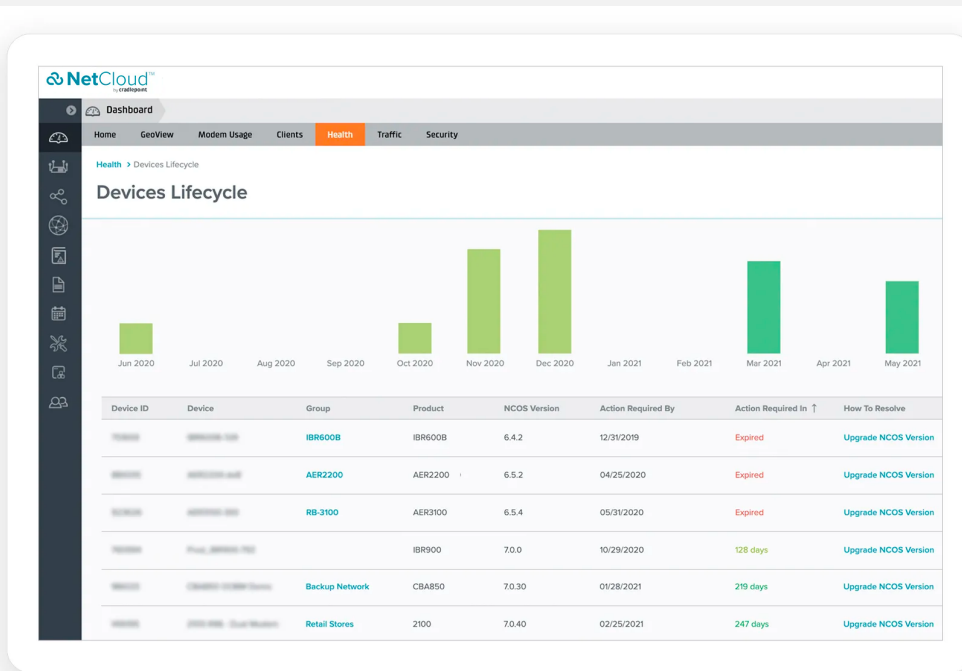

## Security Services

Ericsson NetCloud Advanced Service includes security features that include application aware zone-based firewall, CP Secure Threat Management (IPS/IDS), and CP Secure Web Filter for protecting your network and meeting the evolving security needs of in-vehicle environments.

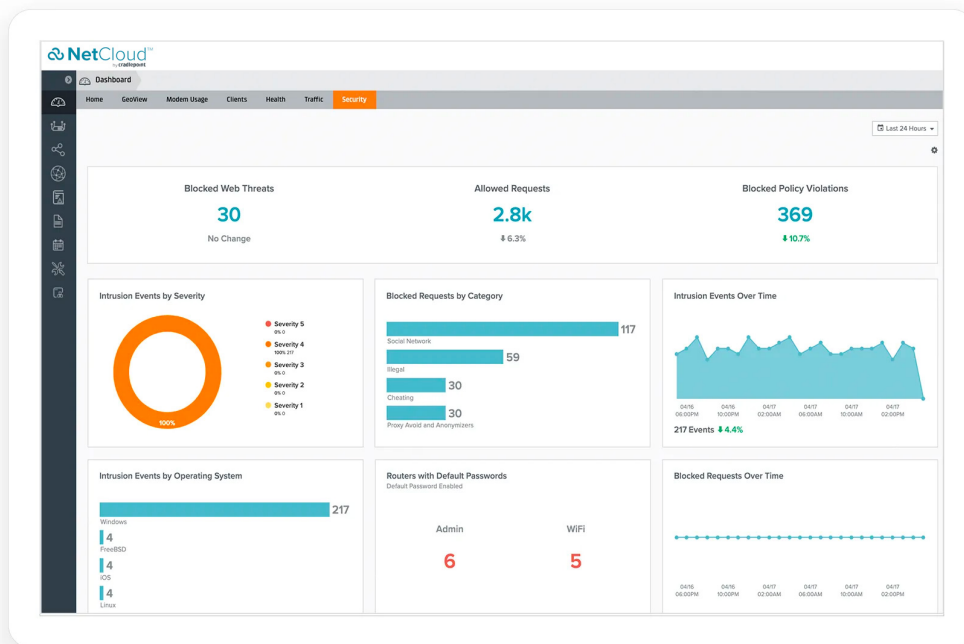

## Connection Manager

Connection Manager provides the ability to manage all WAN connection types, including wireless, Wi-Fi-as-WAN, and wired, from a single software-defined policy. Our proprietary modem software enables users to quickly establish robust Wireless WAN connectivity while maintaining the highest level of resiliency.

The Connection Manager interface displays WAN Device Interface Profiles & Priority. The table below lists the configured profiles and their availability status.

| Profile Name                   | Conditions                                         | Availability |
|--------------------------------|----------------------------------------------------|--------------|
| Ethernet                       | type is Ethernet                                   | Available    |
| SFP0 WAN (VID: unset)          | (Unplugged)                                        | Available    |
| Ethernet WAN (VID: 1)          | (Unplugged)                                        | Available    |
| AT&T SIM Card Slot 1           | type is Modem + tech is LTE/3G + sim is sim1 + ... | Available    |
| Internal C18B (SIM1 - AT&T)    | (Connected)                                        | Available    |
| Verizon SIM Card Slot 2        | type is Modem + tech is LTE/3G + sim is sim2 + ... | Available    |
| Internal C18B (SIM2 - Verizon) | (Available)                                        | Available    |

# Hardware Specifications

The following features are delivered through the hardware.

| INTERFACES |                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Modem:     | <div>Embedded 5GB NR FR1 low-, mid-band, and 4G LTE Category 20 modem</div> <div><ul style="list-style-type: none"><li>4 x SMA cellular antenna connectors<sup>†</sup></li></ul></div>                                                                                                                                                                                                                                                                              |
| Ethernet:  | <div>4 x GbE (LAN/WAN switchable)</div>                                                                                                                                                                                                                                                                                                                                                                                                                             |
| PoE:       | <div>Optional RX30 Managed Accessory PoE Switch</div> <div><ul style="list-style-type: none"><li>4 x PoE 802.3bt Type 3 (up to 60 W per port)</li><li>60 W total PoE power budget</li></ul></div>                                                                                                                                                                                                                                                                   |
| Wi-Fi:     | <div>Dual-radio, dual-band, concurrent operation (2.4 GHz and 5 GHz)</div> <div><ul style="list-style-type: none"><li>2x2 MU-MIMO 802.11ax Wi-Fi 6 with DFS</li><li>574 Mbps (2.4 GHz) &amp; 1,200 Mbps (5 GHz)</li><li>2 x RP-SMA Wi-Fi antenna connectors<sup>†</sup></li><li>Global Optimized Wi-Fi &amp; International SDR</li><li>WPA/WPA2/WPA3 Personal, WPA2/WPA3 Enterprise, Open</li><li>802.11k, 802.11v</li><li>Wi-Fi Alliance Certified</li></ul></div> |
| Bluetooth: | <div>Embedded Bluetooth Low Energy 5.2</div> <div><ul style="list-style-type: none"><li>Max TX Power: 10 dBm</li><li>1 x RP-SMA Bluetooth antenna connector<sup>†</sup></li></ul></div>                                                                                                                                                                                                                                                                             |

**Expansion / Console:**

- 1 x USB 2.0 Type A (Output: 5 V, 500 mA, 2.5 W)
- 1 x DB9 RS-232
- 1 x 8-pin GPIO connector
  - 2x4 Molex micro-fit (3 mm locking type)

**Optional Managed Accessories**

- RX30-POE 4-port GbE PoE switch
- RX30-MC modular modem slot & 4-port GbE switch

**GNSS / GPS:**

1 x SMA GNSS antenna connector<sup>†</sup>

**GNSS / GPS****Acquisition:  
(Time to First Fix)**

30 seconds (cold start)

**Protocols:**

- NMEA 0183
- TAIP

**Constellations:**

- GPS
- Galileo
- GLONASS
- BeiDou (concurrent reception)

**Accuracy:**

Autonomous 1 meter

**Update Rate:**

1 Hz (once per second)

**Sensitivity:**

- Acquisition: -147 dBm
- Tracking: - 165 dBm
- Reacquisition: -159 dBm

**Frequencies:**

L1 (1559–1606 MHz)

**Power:**

- Voltage Supply: 3.1–3.8 V
- Max Current: 30 mA

---

**ENVIRONMENTAL**

---

**Temperature:**

- Operating: -30 °C to 75 °C (-22 °F to 167 °F)<sup>††</sup>
- Storage: -40 °C to 85 °C (-40 °F to 185 °F)

**Humidity:**

- Operating: 5% to 95%
- Storage: 5% to 95%

**Ingress Protection:**

IP64 (dust tight and splashing water)

---

**POWER**

---

**Required:**

DC input steady state voltage range: 9–36 VDC (requires in-line fuse for vehicle installations)

- For 9–24 VDC installations, use a 3 A fuse
- For > 24 VDC installations, use a 2.5 A fuse
- Connector type: 4-pin 2x2 Molex micro-fit

For light rail applications: 24 VDC nominal

**Features:**

- ISO 7637-2 reverse polarity and transient voltage protection
- Ignition sensing (automatic ON & time-delay OFF)

**Consumption:**

- Sleep: 15 mW
- Idle: 11 W
- Typical: 19 W
- Heavy: 22 W

---

**PHYSICAL**

---

|       |                                           |
|-------|-------------------------------------------|
| Size: | 172 x 148 x 41 mm (6.77 x 5.82 x 1.61 in) |
|-------|-------------------------------------------|

|         |                   |
|---------|-------------------|
| Weight: | 0.98 kg (2.15 lb) |
|---------|-------------------|

|             |
|-------------|
| RELIABILITY |
|-------------|

|                  |                                          |
|------------------|------------------------------------------|
| Calculated MTBF: | 340,644 hours (Telcordia SR332 at 25 °C) |
|------------------|------------------------------------------|

|                |
|----------------|
| CERTIFICATIONS |
|----------------|

|         |                                                                                                                        |
|---------|------------------------------------------------------------------------------------------------------------------------|
| Safety: | <ul style="list-style-type: none"><li>• UL/cUL</li><li>• CB Scheme</li><li>• EN 60950-1</li><li>• EN 62368-1</li></ul> |
|---------|------------------------------------------------------------------------------------------------------------------------|

|          |                                                                              |
|----------|------------------------------------------------------------------------------|
| Vehicle: | <ul style="list-style-type: none"><li>• E-Mark</li><li>• SAE J1455</li></ul> |
|----------|------------------------------------------------------------------------------|

|       |                                                                                                                                                                                     |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rail: | <ul style="list-style-type: none"><li>• EN 45545-2:2020 HL3</li><li>• EN 50121-3-2 (Power Surge 0.5 &amp; 1 kV Criteria A; 1.5 kV Criteria C)</li><li>• EN 50155 Class S1</li></ul> |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                       |                                                                                                                    |
|-----------------------|--------------------------------------------------------------------------------------------------------------------|
| Substance Compliance: | <ul style="list-style-type: none"><li>• WEEE</li><li>• RoHS</li><li>• REACH</li><li>• California Prop 65</li></ul> |
|-----------------------|--------------------------------------------------------------------------------------------------------------------|

|           |                                                               |
|-----------|---------------------------------------------------------------|
| Security: | FIPS 140-3 Level 1 Module in Process (R1900 FIPS models only) |
|-----------|---------------------------------------------------------------|

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| Shock/Vibration/Humidity: | MIL-STD-810G, Section 2.2.2, Procedure 1 (Shock, Vibration) |
|---------------------------|-------------------------------------------------------------|

|                             |          |
|-----------------------------|----------|
| North American Fire Safety: | NFPA 130 |
|-----------------------------|----------|

|                            |          |
|----------------------------|----------|
| Flame Smoke Toxicity Test: | BSS 7239 |
|----------------------------|----------|

|                      |               |
|----------------------|---------------|
| Hazardous Locations: | Class I Div 2 |
|----------------------|---------------|

## EDGE COMPUTING

**CPU:** Quad-core ARMv8 64-bit

**Memory:** Up to 1.8 GB  
See [Adjusting Memory Resources for NetCloud Container Orchestrator](#) for more information.

**Flash Storage:** Up to 6 GB  
See [Adjusting Memory Resources for NetCloud Container Orchestrator](#) for more information.

**Applications:** Docker containerized applications

## CLOUD SERVICES

**Service Plans:** Ericsson NetCloud Service for Mobile Performance

**Service Add-Ons:** NetCloud Exchange, Ericsson NetCloud Advanced

**Support:** Ericsson NetCloud packages include support for the full subscription term.

**Warranty:** All Ericsson Cradlepoint hardware products are covered by a limited lifetime warranty for as long as they have a subscription license to an active Ericsson NetCloud Service plan.

**Device Management:** NetCloud Manager for the full subscription term.

**Software Updates:** NetCloud Manager for the full subscription term.

## WI-FI POWER

**FCC:**

- 2.4 GHz: 23 dBm Conducted
- 5260–5825 MHz: 21.90 dBm Conducted

**E.U.:**

- 2.4 GHz: 14.00 dBm Conducted
- 5500–5700 MHz: 18.00 dBm Conducted

**Canada:**

- 2.4 GHz: 23.00 dBm Conducted
- 5500-5580 MHz: 22.00 dBm Conducted
- 5660-5825 MHz: 21.89 dBm Conducted

**Japan:**

- 2.4 GHz: 16.92 dBm Conducted
- 5500-5720 MHz: 21.00 dBm Conducted

**Global Safe Mode:**

2.4 GHz: 14 dBm Conducted

**PERFORMANCE<sup>†††</sup>****Stateful Firewall:**

940 Mbps

**IPS/Application Aware  
Services/Client Analytics:**

940 Mbps

**Point-to-Point IPsec VPN:**

400 Mbps

**SASE/Secure Connect:**

- IPsec: 400 Mbps
- Microtunnel: 540 Mbps<sup>††††</sup>

**SD-WAN:**

- IPsec: 350 Mbps
- Microtunnel: 500 Mbps<sup>††††</sup>

**Concurrent VPN Tunnels:**

20

**Concurrent Sessions (TCP):**

32,000

**Typical Client Count:**

100

**Layer 2 / Layer 3 VLANs:**

Up to 64

**LEDs**Refer to the [R1900 Quick Start Guide](#).

<sup>†</sup> All antenna interfaces require cabled out external antennas and are not compatible with direct-attached antennas.

<sup>††</sup> Wi-Fi and cellular performance may degrade, the RX30 managed accessory is not supported, and the 5G cellular modem

might fallback to LTE connectivity when operating above 70 °C.

†††

Performance testing was conducted based on requirements as defined in RFC2544 using fixed-frame 1518-byte packets.

Throughput results reflect unidirectional UDP traffic with less than 1% packet loss as tested with wired connections. Results do not reflect performance of the cellular wireless operator networks.

††††The specified performance corresponds to a Microtunnel configuration.

# Enterprise-Class Modem Specifications

| SPECIFICATION        | R1900-5GB                                                                                                                                                                                                                                                             |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Technology:          | 5G FR1 NSA/SA and 4G LTE <ul style="list-style-type: none"><li>LTE Advanced Pro Category 20</li><li>Dual SIM slots, 4FF form factor</li><li>3GPP Release 15</li></ul>                                                                                                 |
| 3G:                  | WCDMA/UMTS/HSPA+                                                                                                                                                                                                                                                      |
| Carrier Aggregation: | LTE Only <ul style="list-style-type: none"><li>Downlink: Up to 7 CA</li><li>Uplink: Up to 2 CA</li></ul> LTE + 5G NR ENDC <ul style="list-style-type: none"><li>Downlink: 1 CA</li><li>Uplink: 1 CA</li></ul> See <a href="#">Understanding Carrier Aggregation</a> . |
| Peak Rates:          | <ul style="list-style-type: none"><li>Downlink: Up to 4.14 Gbps</li><li>Uplink: Up to 660 Mbps</li></ul>                                                                                                                                                              |
| MIMO:                | 4x4 MIMO                                                                                                                                                                                                                                                              |
| Modulation:          | 5GB FR1 <ul style="list-style-type: none"><li>Downlink: Up to 256 QAM</li><li>Uplink: Up to 256 QAM. (Only enabled on particular carrier equipment from 9190 data sheet.)</li></ul>                                                                                   |

**5G NR Bands:**

NSA and SA

- n1 (2100), n2 (1900), n3 (1800), n5 (850), n7 (2600), n8 (900), n12 (700), n20 (800), n25 (1900), n28 (700), n38 (2600), n40 (2300), n41 (2500), n48 (3500), n66 (1700/2100), n71 (600), n77 (3700), n78 (3500), n79 (4900)

**4G/LTE Bands:**

FDD

- B1 (2100), B2 (1900), B3 (1800), B4 (1700), B5 (850), B7 (2600), B8 (900), B12 (700), B13 (700), B14 (700), B17 (700), B18 (850), B19 (850), B20 (800), B25 (1900), B26 (850), B28 (700), B29 (700), B30 (2300), B32 (1500), B66 (1700), B71 (600)

TDD

- B34 (2000), B38 (2600), B39 (1900), B40 (2300), B41 (2500), B42 (3500), B43 (3700), B46 (5200), B48 (3500)

**3G Bands:**

1, 2, 3, 4, 5, 6, 8, 9, 19

**Power:**

5G NR

- 5G NR bands: 23 dBm  $\pm$  1.5 (typical conducted)

LTE + 5G NR ENDC

- LTE + 5G NR: 20 dBm  $\pm$  1 (typical conducted)

LTE

- LTE bands: 23 dBm  $\pm$  1 (typical conducted)
- LTE HPUE: 25 dBm  $\pm$  1 (B41 standalone mode only)

**GNSS/GPS:**

Discrete active GPS with dead reckoning

**SMS:**

Yes

**Regulatory:**

- FCC (U.S.)
- IC (Canada)
- CE (EU)
- RCM (AU/NZ)

**Network Operator  
Standards:**

- PTCRB (U.S., Canada)
- GCF (Worldwide)

**GCF Global  
Operators:**

<https://www.globalcertificationforum.org/membership/gcf-members-directory.html>

**PTCRB North  
America  
Operators:**

<https://www.ptcrb.com/about/>

**Network Operator  
Certifications<sup>†</sup>:**

- AT&T
- EE
- Telstra
- T-Mobile
- Verizon

**Public Safety  
Network  
Certifications:**


- ESN (4G)
- FirstNet Trusted™
- T-Mobile Connecting Heroes
- Verizon Frontline Verified

**Private Cellular  
Network:**


Yes, includes FCC Part 96 (CBRS Band 48)

<sup>†</sup> Cellular carriers and operators throughout the world may only require telecom industry certifications, like PTCRB or GCF, to operate on their network. Some carriers require additional testing and approval, beyond telecom certifications, to operate on their network. A carrier listed in the approvals section means Cradlepoint completed additional testing and acquired technical approval for that given carrier. Any carrier not listed may not require additional testing or approval beyond telecom industry certifications to operate on their network.

## Physical Measurements & Features

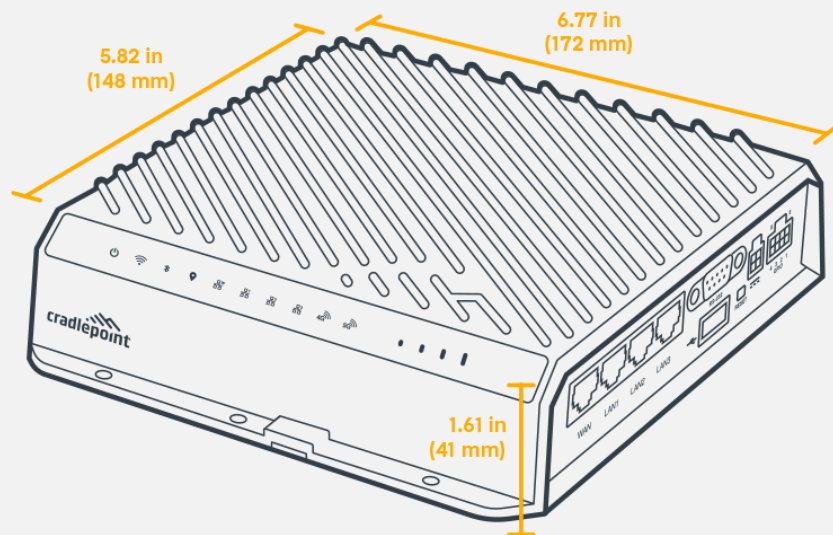

## SIM Card Info

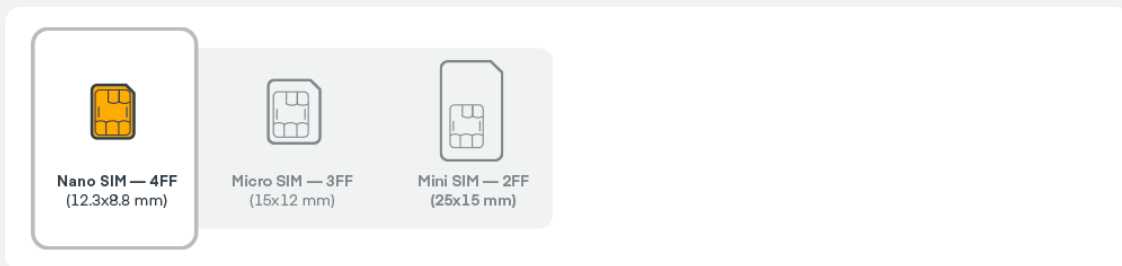

## Ordering Guide

**Ericsson NetCloud Mobile Performance Essentials packages** and plans contain all the features and capabilities required for a broad range of mobile or in-vehicle applications. Essentials packages include 24x7 support (phone support: 24-hour weekdays with emergency response on weekends, web: 24x7, chat: 24x5) and a limited lifetime warranty.

For additional capabilities, an **Ericsson NetCloud Mobile Performance Advanced Plan** can be added to the Ericsson NetCloud Mobile Performance Essentials package at any time.

See additional details of what is included in the Essential and Advanced Ericsson NetCloud software: [cradlepoint.com/netcloud-service](https://cradlepoint.com/netcloud-service)

## Ericsson NetCloud Mobile Performance Packages for the R1900

| REGION                                           | MODEM                                                         | MOBILE PACKAGE PLAN                                 | PART NUMBER             |
|--------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------|-------------------------|
| <b>United States<br/>Federal<br/>Government:</b> | 5G with Wi-Fi & 4FF SIM,<br>no AC power supply or<br>antennas | TAA Compliant NC<br>— Essentials                    | TAA-MB0x-<br>19005GB-GA |
|                                                  |                                                               | TAA Compliant NC<br>— Essentials +<br>Advanced      | TAA-MBAx-<br>19005GB-GA |
|                                                  |                                                               | TAA Compliant NC<br>FIPS — Essentials +<br>Advanced | TAA-MBAx-<br>19005GB-FA |
|                                                  | 5G with Wi-Fi                                                 | Renewal FIPS —<br>Essentials + Advanced             | MBAx-NCESSF-<br>R       |
| <b>All Regions:</b>                              | 5G with Wi-Fi, no AC power<br>supply or antennas              | Essentials                                          | MB0x-<br>19005GB-GA     |
|                                                  |                                                               | Essentials +<br>Advanced                            | MBAx-<br>19005GB-GA     |
|                                                  | 5G with Wi-Fi                                                 | Advanced                                            | MB0x-NCADV              |
|                                                  |                                                               | Renewal Essentials                                  | MB0x-NCESS-<br>R        |
|                                                  |                                                               | Renewal Advanced                                    | MB0x-<br>NCADV-R        |
|                                                  |                                                               | Renewal Essentials<br>+ Advanced                    | MBAx-NCEA-<br>R         |

x = 1, 3, or 5 years

## Accessories

| INCLUDED                                                                                     | PART NUMBER |
|----------------------------------------------------------------------------------------------|-------------|
| GPIO Cable, 2x2, 3 meters, 20 AWG                                                            | 170864-000  |
| Mounting Screw Pack                                                                          | N/A         |
| Mounting Template                                                                            | N/A         |
| OPTIONAL                                                                                     |             |
| GPIO Cable, Small 2x2 Black, 3 meters, 22 AWG                                                | 170585-001  |
| One of the following line cord options:                                                      |             |
| • Line Cord, U.S. (C7), 1.8 meters, North America                                            | 170623-001  |
| • Line Cord, EU (C7), 1.8 meters, European Union                                             | 170623-002  |
| • Line Cord, UK (C7), 1.8 meters, United Kingdom                                             | 170623-003  |
| • Line Cord, AU (C7), 1.8 meters, Australia                                                  | 170623-004  |
| Small 2x2 Power to Barrel Adapter, 152 mm                                                    | 170665-000  |
| For non-production bench testing only:                                                       |             |
| • Cellular Antenna, 600 MHz - 6 GHz, SMA Black Mini (Qty 4)                                  | 170704-002  |
| • Wi-Fi Antenna, Charcoal, Dual-Band 2.4/5 GHz, RPSMA (Qty 2)                                | 170836-000  |
| Mag Mount Kit                                                                                | 170718-000  |
| OBD-II Adapter Kit                                                                           | 170758-000  |
| GPIO Cable, Small 2x3 MPP Black, 3 meters, 18 AWG                                            | 170858-000  |
| GPIO Cable, Small 2x2 MPP Black, 3 meters, 20 AWG                                            | 170864-000  |
| Power Supply, 12 V, Small 2x2 (C7 line cord not include), -30 °C to 70 °C (-22 °F to 158 °F) | 170869-000  |
| Rail Safe GPIO Cable, Small 2x2 Black, 3 meters, 20 AWG                                      | 170871-000  |

## LTE Captive Modem Accessory, Indoor

- |                                            |            |
|--------------------------------------------|------------|
| • CBA550-150M-D (150 Mbps modem), Americas | 170900-001 |
| • CBA550-150M-D (150 Mbps modem), Global   | 170900-002 |
| • L950-C7A (300 Mbps modem), Americas      | 170900-005 |
| • L950-C7A (300 Mbps modem), Global        | 170900-006 |

## 5G Captive Modem Accessory, Outdoor

- |                                                                         |            |
|-------------------------------------------------------------------------|------------|
| • W2005-5GB (4.1 Gbps modem), AP                                        | 170900-009 |
| • W4005-5GB (7.5 Gbps modem), High Band, North America                  | 170900-011 |
| • W1855-5GC (3.4 Gbps modem), North America                             | 170900-016 |
| • W1855-5GC (3.4 Gbps modem), EU                                        | 170900-018 |
| • W1855-5GC (3.4 Gbps modem), UK                                        | 170900-019 |
| • W1855-5GC (3.4 Gbps modem), AP                                        | 170900-021 |
| • R2105-5GB (4.1 Gbps modem), Captive Modem and Wi-Fi Accessory, Global | 170900-014 |
| • R2155-5GB (4.1 Gbps modem), Captive Modem Accessory, Global           | 170900-015 |

## 5G Captive Modem Accessory, Indoor

- |                                        |            |
|----------------------------------------|------------|
| • W1850-5GB (4.1 Gbps modem), Americas | 170900-012 |
| • W1850-5GB (4.1 Gbps modem), Global   | 170900-013 |
| • W1850-5GC (3.4 Gbps modem), Americas | 170900-017 |
| • W1850-5GC (3.4 Gbps modem), Global   | 170900-020 |

## RX30-MC Managed Accessory — Modular Modem and Switch (modem sold separately)

- |                                                                                                                                             |                  |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------------|
|                                                                                                                                             | MB-RX30-MC       |
| • MC400 LTE Advanced Pro Modem (1200 Mbps) upgrade for Mobile. Includes IBR1700 with COR Extensibility Dock doors, no antennas <sup>†</sup> | MA-MC400-1200M-B |
| • MC400 5G Modem (requires 4FF SIM) upgrade for R1900 with RX30-MC or IBR1700 Mobile Routers with doors <sup>†</sup>                        | MB-MC400-5GB     |

## RX30-PoE Managed Accessory — PoE Switch

MB-RX30-POE

## UNITED STATES FEDERAL GOVERNMENT

|                                                                                                                                                                                                                                                                                                                    |                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| GPIO Cable, Small 2x2 Black, 3 meters, 22 AWG                                                                                                                                                                                                                                                                      | TAA-170585-001       |
| LTE Captive Modem Accessory, Indoor, CBA550-150M-D (150 Mbps modem), Americas                                                                                                                                                                                                                                      | TAA-170900-001       |
| LTE Captive Modem Accessory, Indoor, L950-C7A (300 Mbps modem), Americas                                                                                                                                                                                                                                           | TAA-170900-005       |
| 5G Captive Modem Accessory, Outdoor, W2005-5GB (4.1 Gbps modem), North America                                                                                                                                                                                                                                     | TAA-170900-007       |
| 5G Captive Modem Accessory, Outdoor, High-Band, W4005-5GB (7.5 Gbps modem), North America                                                                                                                                                                                                                          | TAA-170900-011       |
| 5G Captive Modem Accessory, Indoor, W1850-5GB (4.1 Gbps modem), Americas                                                                                                                                                                                                                                           | TAA-170900-012       |
| RX30-MC Managed Accessory — Modular Modem and Switch (modem sold separately)                                                                                                                                                                                                                                       | TAA-MB-RX30-MC       |
| <ul style="list-style-type: none"><li>MC400 LTE Advanced Pro Modem (1200 Mbps) upgrade for Mobile. Includes IBR1700 with COR Extensibility Dock doors, no antennas<sup>†</sup></li><li>MC400 5G Modem (requires 4FF SIM) upgrade for R1900 with RX30-MC or IBR1700 Mobile Routers with doors<sup>†</sup></li></ul> | TAA-MA-MC400-1200M-B |
|                                                                                                                                                                                                                                                                                                                    | TAA-MB-MC400-5GB     |
| RX30-PoE Managed Accessory — PoE Switch                                                                                                                                                                                                                                                                            | TAA-MB-RX30-POE      |

<sup>†</sup> Refer to the [Cradlepoint MC400 Modular Modem](#) webpage for more information about modular modems.

## Support & Warranty

The Ericsson Cradlepoint R1900 5G router is only sold as a component of NetCloud Mobile Performance Essentials or Essentials + Advanced packages.

- Ericsson NetCloud packages include support for the full subscription term.
- All Ericsson Cradlepoint hardware products are covered by a limited lifetime warranty for as long as they have a subscription license to an active Ericsson NetCloud Service plan.

Find the most up-to-date information at [cradlepoint.com/r1900](https://www.cradlepoint.com/r1900)